



# Collision Avoidance Approach for Performance Optimization in Packet Switched Network

Sabyasachi Mukherjee\*

Assistant Professor

ECE Department, Sharda University

Anupam Kumar Yadav

Assistant Professor

ECE Department, Noida International University

---

**Abstract**— *There is a need for improved network traffic and bandwidth management is also becoming more urgent with the increased use of real time applications. Switches are being used by computer networks for enabling connection between those hosts which do not have a direct link. Collision in data packets occurred when two or more than two host attempt to transmit packet at the same time. In this paper an optimized performance of local area network in terms of collision count and some other parameter have been investigated using simulation model. Simulation results have been obtained in different network scenarios by varying the number of devices in the network.*

**Keywords**— LAN, Switches, Hubs, CSMA/CD, collision count.

---

## I. INTRODUCTION

Local Area Network (LAN) technology has made a significant impact on almost every industry. Operations of these industries depend on computers and networking. The data is stored on computers than on paper, and the dependence on networking is so high that banks, airlines, insurance companies and many government organizations would stop functioning if there were a network failure. Since, the reliance on networks is so high and the network traffic is increasing, we have to address some of the bandwidth problems this has caused and find ways to tackle them [3-4].

A collision is a mechanism used by Ethernet to control access and allocate shared bandwidth among stations that want to transmit at the same time in a shared medium. There must be some mechanisms by which stations can come to know about that they want to transmit at the same time. Such mechanisms are known as collision detection methods. Ethernet uses CSMA/CD (Carrier Sense Multiple Access/Collision Detection) for collision detection. The use of switch makes it possible to reduce the collision in Ethernet. The communication procedures follow the certain rules. For example, when a peripheral device wishes to communicate, it sends the request for communication that reaches the switch. If another peripheral device communicates already, two messages are found at the same time on the network. The message from the first host is taken at the beginning of a queue, and the second host waits for trying again to communicate a few milliseconds later [7].

The key problem that a switch must deal with is the finite bandwidth of its outputs [1]. If packets destined for a certain output arrive at a switch and their arrival rate exceeds the capacity of that output, then we have a problem of connection. In this case, the switch will queue (or buffer) packets until the contention subsides. If it lasts too long, however, the switch will run out of buffer space and be forced to discard the packets. When packets are discarded too frequently, the switch is said to be congested [3].

In this paper we implemented a platform for performance assessment of Ethernet for different scenarios by varying the number of network devices and studied some network parameters like throughput, delay and collision count. The rest of the paper is organized as follows. In section II, we have described switched LAN (Local Area Network). In section III, we have presented our simulation model. In section IV, we have compared the obtained results from simulation. In section V, conclusion is presented.

## II. SWITCHED LAN

Recently the Ethernet has become the most widespread LAN. With gigabit technology it started a new stage of popularity. And this is not the limit yet. Hubs are dumb passive equipment aimed only at the connection of devices as wires. The base element of the Local Area Network (LAN) Ethernet (IEEE 802.x) is a switch of frames. Logically a switch is constituted of a set of ports [6]. LAN segment (for example, made up via hub) or terminal equipment such as workstation or server may be attached to each port. The task of a switch is the forwarding of incoming frame to the port that the target device is connected to. The usage of a switch allows for a decrease in quantity of collisions so each frame is transmitted only to the target port and results in an increased bandwidth. Moreover the quality of information protection rises with a reduction of ability to overhear traffic.

There is a limit on the number of hosts that can be attached to a single network and on the size of a geographic area that a single network can serve [6]. Computer networks use switches to enable the communication between one host and another, even when no direct connection exists between those hosts [5]. The key problem that a switch must deal with is the finite bandwidth of its outputs [7]. If packets destined for a certain output arrive at a switch and their arrival rate exceeds the capacity of that output, then we have a problem of connection. In this case, the switch will queue (or buffer)

packets until the contention subsides. If it lasts too long, however, the switch will run out of buffer space and be forced to discard the packets. When packets are discarded too frequently, the switch is said to be congested [1]. Local Area Networks in many organizations have to deal with increased bandwidth demands. More and more users are being added to the existing LANs. If this was the only problem, it could be solved by upgrading the backbone that connects various LANs. Bridges and routers can be used to keep the number of users per LAN at an optimal number. However with increase in the speed of workstation the bandwidth requirement of each machine has grown more than five times in the last few years. Coupled with bandwidth hungry multimedia applications and unmanaged and bursty traffic this problem is further aggravated. With the increasing use of client-server architecture in which most of the software is stored in the server, the traffic from workstations to server has increased. Further, the use of a large number of GUI applications means more pictures and graphics files need to be transferred to the workstations. This is another cause of increased traffic per workstation [7].

LAN switching is a fast growing market, with virtually every network vendor marketing its products. Besides LAN switches, switching routers, switching hubs are also sold. Different vendors add new features to their products to keep them competitive. At present, one can get switches that link same as well as different LAN topologies.

We have studied two cases: 1) Ethernet with the hub only, and 2) Ethernet with the hub and switch. The results demonstrate that, although the traffic send is almost the same in both cases, the traffic received has improved in the Hub-and-Switch case. The second configuration makes network perform better in terms of throughput and delay characteristics. With a switched network any user can be connected to each port directly [3]. Therefore, the bandwidth is shared only among a number of users in the workgroup (connected to the ports). Since this is the reduced media, the sharing of other portions of the bandwidth is available. Switches can also maintain multiple connections at one point [4]. Switches normally have higher port counts than bridges and divide network into several dedicated channels independent (“parallel”) from each other. These multiple independent data paths increase the throughput capacity of a switch. There is no contention to gain access, and LAN switch architecture becomes scalable. Another advantage of switches is that most of them are self-configuring. This property allows to minimizing the network downtime, although ways for manual configuration are also available [2].

### III. SIMULATION MODEL

We considered a hypothetical network topology as illustrated in our simulations, in order to demonstrate the performance of different LANs using only hub and switch. The simulation is carried out with riverbed modeller academic edition 17.5. 10BaseT link is used to connect the two hubs with the switch and all other links are also taken 10BaseT. Clients working with multimedia or any other bandwidth hungry application will consume lot of bandwidth, so the workgroup should be appropriately segmented to keep the traffic low in that particular LAN segment. Replacing concentrators, repeaters, or hubs in a workgroup with LAN switches can substantially increase the effective transmit bandwidth to each user. Full duplex operation would further enhance the bandwidth availability. Workgroup switches should be provided with high speed ports for connecting to servers [3].

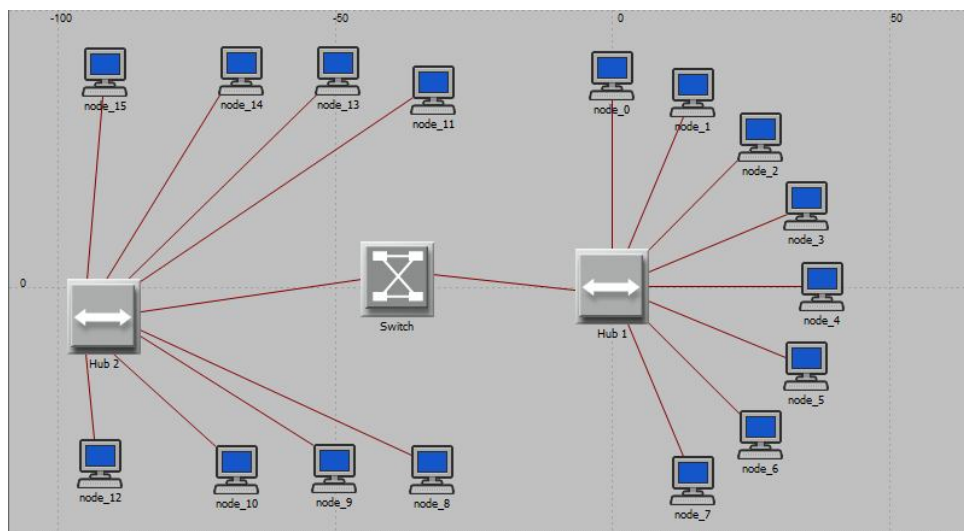


Fig. 1 The Topology for which the simulation was carried out

The effect of random-early drop over drop-tail policy is also tested. While enabling random-early drop, the minimum threshold is kept 200 and maximum threshold is kept 400. Mark probability denominator, that is, the fraction of packets dropped when the average queue size is at maximum threshold, is considered 12. The value of the exponential weight factor, which is used to calculate the average queue size based on the previous average and current queue size, is kept 9.

Attribute	Value
Weight	55
Maximum Queue Size (pkts)	500
Classification Scheme	(...)
rows	1
row 0	
ToS	EF
Protocol	Unassigned
Source Address	Video client
Destination Address	Video Server
Source Port	Unassigned
Destination Port	Unassigned
Incoming Interface	Unassigned
RED Parameters	(...)
RED Status	RED Enabled
Exponential Weight Factor	8
Minimum Threshold	200
Maximum Threshold	400
Mark Probability Denomi...	12
CE Marking	Disabled
Queue Category	None
Buffer Capacity	1000

Fig. 2 IP RED definition

Size of the packets are kept constant value 1500 bytes with exponential interarrival time 0.02 seconds. ON state and OFF state time are kept exponential.

Traffic Generation Parameters	(...)
Start Time (seconds)	constant (5.0)
ON State Time (seconds)	exponential (100.0)
OFF State Time (seconds)	exponential (0.00001)
Packet Generation Arguments	(...)
Interarrival Time (seconds)	exponential (0.02)
Packet Size (bytes)	constant (1500)
Segmentation Size (bytes)	No Segmentation

Fig. 3 Packet definition

After all the consecutive simulation runs, simulation results were collected for each data traffics, based on the chosen global statistics, for the different scenarios. The comparison of the simulation results are discussed in the next section [3].

#### IV. RESULT ANALYSIS

For multimedia applications or any other bandwidth hungry application will consume lot of bandwidth, so the workgroup should be appropriately segmented to keep the traffic low in that particular LAN segment. Replacing concentrators, repeaters, or hubs in a workgroup with LAN switches can substantially increase the effective transmit bandwidth to each user. Full duplex operation would further enhance the bandwidth availability. Workgroup switches should be provided with high speed ports for connecting to servers. The following study demonstrates why the adding of a switch makes a network perform better in terms of throughput and delay characteristics.

##### A. Traffic received for Interactive Multimedia

We have studied two cases: 1) Ethernet with the hub only, and 2) Ethernet with the hub and switch. The results shown in Figures 4 and 5 demonstrate that, although the traffic send is almost the same in both cases, the traffic received has improved in the Hub-and-Switch case. The second configuration makes network perform better in terms of throughput and delay characteristics.

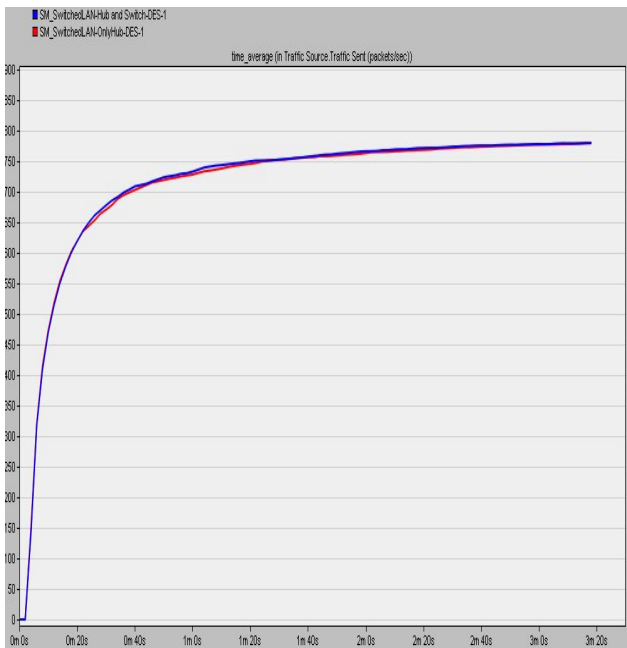


Fig. 4 Traffic sent (Packets/sec)

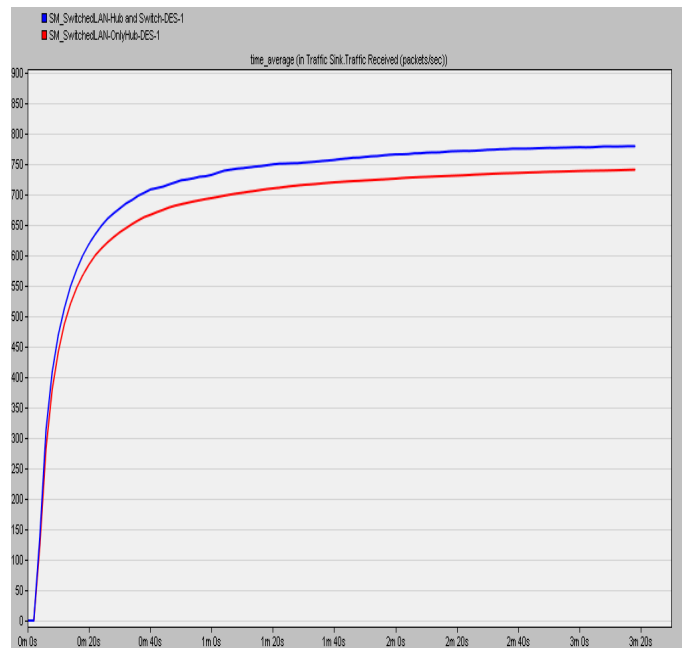


Fig. 5 Traffic received (Packets/sec)

### B. Latency

Figure 6 shows the time average traffic end-to-end delay (sec) graph for the two scenarios. It is also clear from the graph that network with switch provide less latency and the delay is almost constant for traffic.

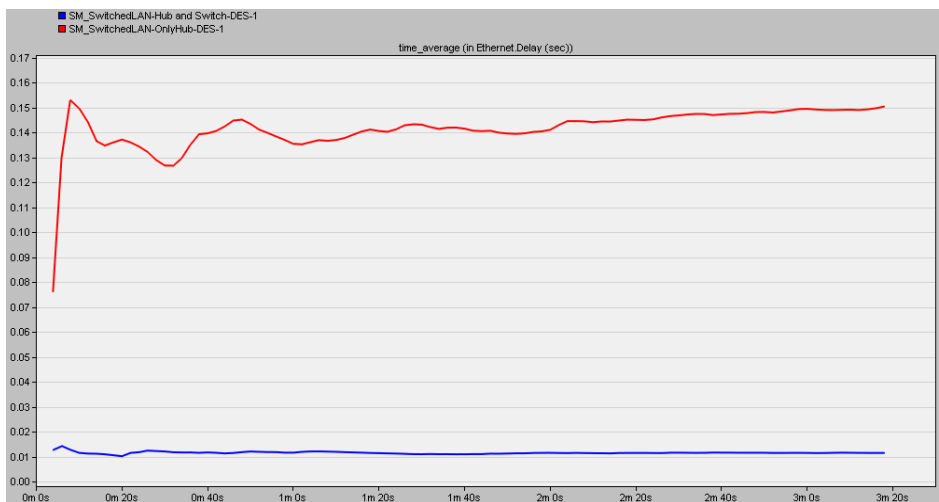


Fig. 6 Ethernet delay (sec)

### C. Collision count in the switched LAN

The use of the switch makes it possible to reduce the collisions on the network. The result can be observed from Figure 7. The communication procedures follow the certain rules. For example, when a peripheral device wishes to communicate, it sends the request for communication that reaches the switch. If another peripheral device communicates already, two messages are found at the same time on the network. The message from the first host is taken at the beginning of a queue, and the second host waits for trying again to communicate a few milliseconds later. Switches upon finding that the destination port is overloaded will send the *jam* message to the sender. Since the decoding of the MAC address is fast and the switch can, in very little time, respond with a *jam* message, collision or packet loss can be avoided [3, 7].

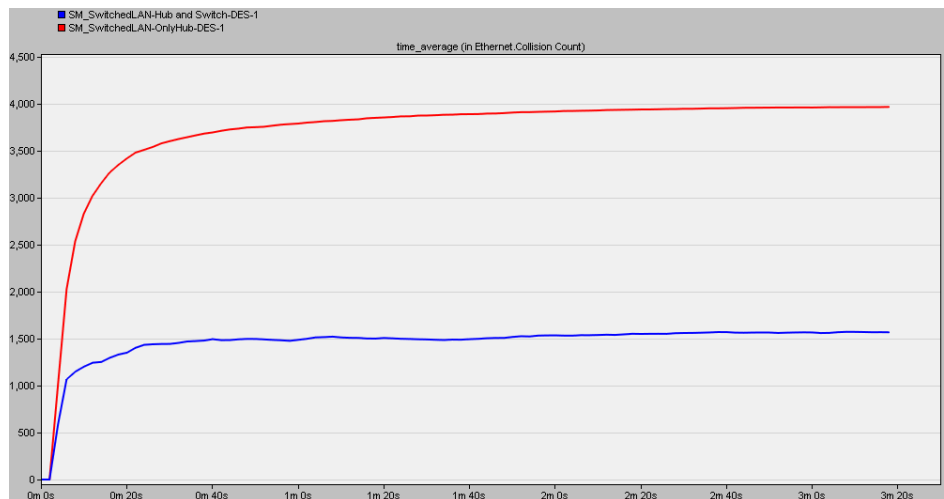


Fig. 7 Ethernet Collision count

## V. CONCLUSION

In the present work the technology of switched local area networks' models development was studied. The usage of switch in LAN tremendously enhanced the performance of the network. The model reflects the major features of a real-life network. CSMA procedures, full-duplex mode and switching tables were modelled. a special measuring model of workstation was suggested and implemented to estimate the network performance. The model developed is of enterprise class, so it allows easy and convenient adequate representation of LAN with an arbitrary given topology. the technique described is aimed at realtime applications, requiring the precise estimation of timed delays before implementation.

## ACKNOWLEDGMENT

This work is supported by the electronics and communication engineering department of Sharda University, Greater noida, National institute of technical teachers training and research, Chandigarh.

## REFERENCES

- [1] A. Shawish, X. Jiang and S. Horiguchi, "Voice Capacity Analysis and Enhancement in Wireless LAN" *WCNC 2008* pp. 2153-2157, 2008
- [2] L. Sun, "Speech Quality Prediction for Voice Over Internet Protocol Networks." *Doctor of hilosophy Thiese* January 2004
- [3] Opnet Training Course Modeler Notoes, *www.opnet.com Traning documents*, 2006
- [4] Minagawa,T.; Ikegami,T., "Controlling User Flows with RIO and WFQ", 2010 International Symposium on Communications and Information Technologies (ISCIT), 10.1109/ISCIT.2010.5664907, 2010, pp. 87-92.
- [5] G. Kramer, B. Mukherjee, and G. Pessavento, "IPACT: A Dynamic Protocol for an Ethernet PON (EPON)," *IEEE Communication Magazine* Vol.40, Issue 2, February 2002, pp.74-80.
- [6] M. Ma, Y. Zhu, and T. Cheng, "A bandwidth guaranteed polling MAC protocol for ethernet passive optical networks," *Proc. IEEE INFOCOM*, San Francisco, CA, 2003, pp. 22-31.
- [7] D. Bertsekas, R. Gallager, "Data Networks," Prentice Hall, 2nd, 195-210p.