



# ANALYTICAL INVESTIGATIONS ON PROPERTIES OF REACTANTS [H<sub>2</sub> - AIR] AND PRODUCTS AT DIFFERENT EQUIVALENCE RATIO

Dr. Vikas J. Patel  
CKPCET, Surat.

Dr. S.A.Channiwala  
SVNIT, Surat

---

**ABSTRACT--***The rapidly increasing world wide demand for energy and the progressive depletion of fossil fuels has led to an intensive research for alternative fuels which can be produced on a renewable basis. Hydrogen in the form of energy will almost certainly be one of the most important energy components of the early next century. Hydrogen is a clean burning and easily transportable fuel. Most of the pollution problems posed by fossil fuels at present would practically disappear with Hydrogen since steam is the main product of its combustion. The various properties of hydrogen (specific heat, thermal conductivity, kinematic viscosity, density, prandtl no.) have been calculated at various equivalence ratios at different temperatures. Graphs of these properties have been plotted. The software of various property of hydrogen and calculation of all properties was developed using the turbo C language.*

---

## **INTRODUCTION**

The rapidly increasing world wide demand for energy and the progressive depletion of fossil fuels has led to an intensive research for alternative fuels which can be produced on a renewable basis. Hydrogen in the form of energy will almost certainly be one of the most important energy components of the early next century. Hydrogen is a clean burning and easily transportable fuel. Most of the pollution problems posed by fossil fuels at present would practically disappear with Hydrogen since steam is the main product of its combustion.

## **CRITERIA FOR THE FUTURE FUEL SYSTEM**

Many investigations and studies have led to the recognition that the creative scope of a future energy supply is large that there are energy supply options other than mere expansion of conventional energy sources. Discussion for one or the other option therefore has to be carefully prepared. The criteria for future fuel system are listed below:

### **1. TECHNOLOGY / ECOLOGY EFFICIENCY**

- # Energy conversion efficiency. (Primary energy to usable energy)
- # Type of primary energy.
- # Raw material requirements, ability to be mined or recycle, possible use of or disposal of water.
- # Land requirements, effect on climate, ground water etc.

### **2. OPERATING EFFICIENCY**

- # Specific energy costs.(at start-up, total lifetime, progressions)
- # Requisite up-front payments, type of costs.
- # Amortization times, break-even point etc.

### **3. ECONOMIC EFFICIENCY**

- # Influence on economic structures.
- # Effect on employment.
- # Export potential, influence on balance of trade and output .
- # Costs of prevention or repair of ecological or societal damage.
- # Repercussions on residential and transportation structures.

### **4. SUPPLY ASSURANCE**

- # Technical availability under normal operations, life-span etc.
- # Potential dangers and safety in case of accidents.
- # System flexibility under changing conditions.(short and medium term, e.g. delivery, restrictions, long term, e.g. substitution of an energy carrier)

### **5. SOCIAL COMPATIBILITY**

- # Expansion or restriction of development and room for manoeuvre of potential entities, economic entities and the individual
- # Compatibility with democratic groundless.
- # Compatibility with practice and principles of international trade and with interest of the trading partner.

## **PROPERTIES OF HYDROGEN**

### **PHYSICAL PROPERTIES**

Hydrogen is a colorless and odorless gas. Its density is 0.0899 g/l (air is 14.4 times as dense). Hydrogen boils at  $-252.77^{\circ}\text{C}$ . Liquid hydrogen has a density of 70.99 g/l. With these properties, hydrogen has the highest energy to weight ratio of all fuels. 1 kg of hydrogen contains the same amount of energy as 2.1 kg of natural gas or 2.8 kg of gasoline. The energy to volume ratio amounts to about 1/4 of that for petroleum and 1/3 of that for natural gas. Water consists of 11.2% hydrogen by weight. Hydrogen burns in air at concentrations in the range of 4 - 75% by volume (methane burns at 5.3 - 15% and propane at 2.1 - 9.5% concentrations by volume). The highest burning temperature of hydrogen of  $2318^{\circ}\text{C}$  is reached at 29% concentration by volume, whereas hydrogen in an oxygen atmosphere can reach burning temperatures up to  $3000^{\circ}\text{C}$  (the highest reached burning temperature in air for methane is  $2148^{\circ}\text{C}$  and for propane  $2385^{\circ}\text{C}$ ). The minimum required ignition energy required for a stoichiometric fuel/oxygen mixture is for hydrogen 0.02 mJ, for methane 0.29 mJ and for propane 0.26 mJ. Even the energy of a static electric discharge from the arcing of a spark is sufficient to ignite natural gas so it is largely irrelevant that hydrogen requires only a tenth of this energy for ignition. The temperatures for spontaneous combustion of hydrogen, methane and propane are  $585^{\circ}\text{C}$ ,  $540^{\circ}\text{C}$  and  $487^{\circ}\text{C}$  respectively.

The explosive regions for hydrogen and methane lie in the ranges 13% - 59% and 6.3% - 14% respectively. The explosive range for hydrogen is clearly much greater, whereas methane is already explosive at a much lower concentration. The diffusion coefficient for hydrogen at 0.61 cm<sup>3</sup>/s is 4 times as high as that for methane. Hydrogen therefore mixes in air considerably faster than methane or petrol vapor, which is advantageous in the open but represents a potential disadvantage in badly ventilated interiors. Since both hydrogen and natural gas are lighter than air they rise quickly. Propane and petrol vapor are in contrast heavier than air and remain on the ground, leading to a higher likelihood of explosion.

### **ENVIRONMENTAL ADVANTAGES**

The burning of hydrogen with air under appropriate conditions in combustion engines or gas turbines results in very low or negligible emissions. Trace hydrocarbon and carbon monoxide emissions, if at all generated, can only result from the combustion of motor oil in the combustion chamber of internal combustion engines. Nitrous oxide emissions increase exponentially with the combustion temperature. These can therefore be influenced through appropriate process control. As hydrogen offers more possibilities than other fuels, a distinct reduction in NO<sub>x</sub> emissions is possible compared to mineral oil and natural gas, provided that a lower combustion temperature is achieved (e.g. with a high air to fuel ratio). Particulate and sulfur emissions are completely avoided apart from small quantities of lubricant remnants. The use of hydrogen in fuel cell propulsion systems with low temperature fuel cells (Membrane fuel cells: PEMFC) completely eliminates all polluting emissions. The only by-product resulting from the generation of electricity from hydrogen and oxygen in the air is demineralised water. Use of hydrogen in fuel cells at higher temperature levels causes up to 100 times fewer emissions compared with conventional power stations. If the hydrogen is obtained from methanol however, then the reforming process itself will result in carbon dioxide emissions. Furthermore hydrogen offers the possibility, depending on production method, to drastically reduce or avoid emissions, especially carbon dioxide (CO<sub>2</sub>), in the whole fuel cycle. Using hydrogen as secondary energy carrier would allow the flexible introduction of the most diverse renewable energies into the fuel sector. Since hydrogen is a secondary energy carrier, the complete fuel cycle from primary energy source to final application must be considered when judging the environmental relevance.

### **COMPOUNDS**

Although pure Hydrogen is a gas we find very little of it in our atmosphere. Hydrogen gas is so light that uncombined Hydrogen will gain enough velocity from collisions with other gases that they will quickly be ejected from the atmosphere. On earth, hydrogen occurs chiefly in combination with oxygen in water, but it is also present in organic matter such as living plants, petroleum, coal, etc. It is present as the free element in the atmosphere, but only to the extent of less than 1 ppm by volume. The lightest of all gases, hydrogen combines with other elements -- sometimes explosively -- to form compounds.

### **FORMS**

Quite apart from isotopes, it has been shown that under ordinary conditions hydrogen gas is a mixture of two kinds of molecules, known as ortho- and para-hydrogen, which differ from one another by the spins of their electrons and nuclei. Normal hydrogen at room temperature contains 25% of the para form and 75% of the ortho form. The ortho form cannot be prepared in the pure state. Since the two forms differ in energy, the physical properties also differ. The melting and boiling points of parahydrogen are about 0.1oC lower than those of normal hydrogen.

### **ISOTOPES**

The ordinary isotope of hydrogen, H, is known as Protium, the other two isotopes are Deuterium (a proton and a neutron) and Tritium (a proton and two neutrons). Hydrogen is the only element whose isotopes have been given different names. Deuterium and Tritium are both used as fuel in nuclear fusion reactors. One atom of Deuterium is found in about 6000



ordinary hydrogen atoms. Deuterium is used as a moderator to slow down neutrons. Tritium atoms are also present but in much smaller proportions. Tritium is readily produced in nuclear reactors and is used in the production of the hydrogen (fusion) bomb. It is also used as a radioactive agent in making luminous paints, and as a tracer.

### **GENERAL STRUCTURE**

Atomic Number: 1  
Group: 1  
Period: 1  
Series: Nonmetals

### **NAME IN OTHER LANGUAGES**

- Latin: Hydrogenium
- Czech: Vodík
- Croatian: Vodik
- French: Hydrogène
- German: Wasserstoff – r
- Italian: Idrogeno
- Norwegian: Hydrogen
- Portuguese: Hidrogênio
- Spanish: Hidrógeno
- Swedish: Väte

### **ATOMIC STRUCTURE**

- Atomic Radius: 0.79Å
- Atomic Volume: 14.4cm<sup>3</sup>/mol
- Covalent Radius: 0.32Å
- Cross Section: 0.33barns
- Crystal Structure: Hexagonal
- Electron Configuration: 1s<sup>1</sup>
- Electrons per Energy Level: 1

### **SHELL MODEL**

- Ionic Radius: 0.012Å
- Filling Orbital: 1s<sup>1</sup>
- Number of Electrons (with no charge): 1
- Number of Neutrons (most common/stable nuclide): 0
- Number of Protons: 1
- Oxidation States: 1
- Valance Electrons: 1s<sup>1</sup>

### **CHEMICAL PROPERTIES**

- Electrochemical Equivalent: 0.037605g/amp-hr
- Electron Work Function:
- Electronegativity (Pauling): 2.2
- Heat of Fusion: 0.05868kJ/mol
- Incompatibilities: metals, oxidizing materials, metal oxides, combustible materials, halogens, metal salts, halo carbons
- Ionization Potential First: 13.598
- Valance Electron Potential (-eV): 1200

### **REGULATORY / HEALTH**

- CAS Number  
1333-74-0 Compressed gas
- UN/NA ID and ERG Guide Number  
UN1049 / 115 Compressed gas UN1966 / 115 Refrigerated liquid
- RTECS: MW8900000
- NFPA 704  
Health: 1  
Fire: 4  
Reactivity: 0  
Special Hazard:
- OSHA Permissible Exposure Limit (PEL)

No limits set by OSHA

•OSHA PEL Vacated 1989


No limits set by OSHA

•NIOSH Recommended Exposure Limit (REL)

No limits set by NIOSH

### COMBUSTION OF HYDROGEN

•Hydrogen burns in oxygen or air to form water.




•Oxygen will also burn in hydrogen.

•Hydrogen does not itself support combustion, as may be shown by passing a lighted taper into an inverted jar of hydrogen, when the taper is extinguished.

A mixture of hydrogen with oxygen or air explodes violently when kindled, provided either gas is not present in too large excess.

### REACTION STOICHIOMETRY AND COMPUTATION OF MASS FRACTION AND PROPERTIES OF REACTANTS AND PRODUCTS

**Stoichiometric Reaction for ( $\phi < 1$ )**



**Mass Fractions of Reactants:**

Total mass of reactants  $m_r$ :

$$m_r = 2 + \left( \frac{1}{2\phi} \times 137.336 \right) \text{kg}$$

$$= 2 \left( \frac{\phi + 34.334}{\phi} \right) \text{kg}$$

Mass fraction of  $\text{H}_2$ ;  $X_{\text{H}_2,r}$

$$X_{\text{H}_2,r} = \frac{2}{m_r}$$

Mass fraction of  $\text{O}_2$ ;  $X_{\text{O}_2,r}$

$$X_{\text{O}_2,r} = \frac{16}{m_r \times \phi}$$

Mass fraction of  $\text{N}_2$ ;  $X_{\text{N}_2,r}$

$$X_{\text{N}_2,r} = \frac{52.668}{m_r \times \phi}$$

**Mass Fraction of Products:**

Total mass of Products:  $m_p$

$$m_p = 18 + (16) \left( \frac{1-\phi}{\phi} \right) + \frac{52.668}{\phi} \text{kg}$$

Mass fraction of  $\text{H}_2\text{O}$ ;  $X_{\text{H}_2\text{O},p}$



$$X_{H_2O,p} = \frac{18}{m_p}$$


Mass fraction of O<sub>2</sub>;  $X_{O_2,p}$

$$X_{O_2,p} = \frac{16\left(\frac{1-\phi}{\phi}\right)}{m_p}$$

Mass fraction of N<sub>2</sub>;  $X_{N_2,p}$

$$X_{N_2,p} = \frac{52.668}{m_p \times \phi}$$

**Stoichiometric Reaction for ( $\phi = 1$ )**



**Mass Fractions of Reactants:**

Total mass of reactants  $m_r$ :

$$\begin{aligned} m_r &= 2 + \left(\frac{1}{2}\phi \times 137.336\right) \text{kg} \\ &= 70.668 \text{kg} \end{aligned}$$

Mass fraction of H<sub>2</sub>;  $X_{H_2,r}$

$$X_{H_2,r} = \frac{2}{70.668} = 0.0283$$

Mass fraction of O<sub>2</sub>;  $X_{O_2,r}$

$$X_{O_2,r} = \frac{16}{70.668} = 0.2264$$

Mass fraction of N<sub>2</sub>;  $X_{N_2,r}$

$$X_{N_2,r} = \frac{52.668}{70.668} = 0.7453$$

**Mass Fraction of Products:**

Total mass of Products:  $m_p$

$$m_p = 18 + (16)\left(\frac{1-\phi}{\phi}\right) + \frac{52.668}{\phi} \text{kg}$$

Mass fraction of H<sub>2</sub>O;  $X_{H_2O,p}$

$$X_{H_2O,p} = \frac{18}{m_p} = \frac{18}{70.668} = 0.2547$$


Mass fraction of O<sub>2</sub>;  $X_{O_2,r}$

$$X_{O_2,p} = \frac{16 \left( \frac{1-\phi}{\phi} \right)}{m_p} = 0$$

Mass fraction of N<sub>2</sub>;  $X_{N_2,p}$

$$X_{N_2,p} = \frac{52.668}{70.668} = 0.7453$$

**Stoichiometric Reaction for ( $\phi > 1$ )**



**Mass Fractions of Reactants:**

Total mass of reactants  $m_r$ :

$$m_r = 2\phi + 68.668 \text{ kg}$$

Mass fraction of H<sub>2</sub>;  $X_{H_2,r}$

$$X_{H_2,r} = \frac{2\phi}{m_r}$$

Mass fraction of O<sub>2</sub>;  $X_{O_2,r}$

$$X_{O_2,r} = \frac{16}{m_r}$$

Mass fraction of N<sub>2</sub>;  $X_{N_2,r}$

$$X_{N_2,r} = \frac{52.668}{m_r}$$

**Mass Fraction of Products:**

Total mass of Products:  $m_p$

$$m_p = 18 + 2 \times (\phi - 1) + 52.668 \text{ kg}$$

Mass fraction of H<sub>2</sub>O;  $X_{H_2O,p}$

$$X_{H_2O,p} = \frac{18}{m_p}$$

Mass fraction of H<sub>2</sub>;  $X_{H_2,p}$

$$X_{H_2,p} = \frac{2(\phi - 1)}{m_p}$$



Mass fraction of  $N_2$ ;  $X_{N_2,p}$

$$X_{N_2,p} = \frac{52.668}{m_p}$$

**Specific Heat of Reactants:**

$$C_{p,r,T_r} = X_{H_2,r} C_{p_{H_2,T_r}} + X_{O_2,r} C_{p_{O_2,T_r}} + X_{N_2,r} C_{p_{N_2,T_r}}$$

**Specific Heat of Products:**

$$C_{p,p,T_p} = X_{H_2,p} C_{p_{H_2,T_p}} + X_{O_2,p} C_{p_{O_2,T_p}} + X_{N_2,p} C_{p_{N_2,T_p}} + X_{H_2O,p} C_{p_{H_2O,T_p}}$$

**Thermal Conductivity for Reactants:**

$$K_{r,T_r} = X_{H_2,r} K_{H_2,T_r} + X_{O_2,r} K_{O_2,T_r} + X_{N_2,r} K_{N_2,T_r}$$

**Thermal Conductivity for Products:**

$$K_{p,T_p} = X_{H_2O,p} K_{H_2O,T_p} + X_{O_2,p} K_{O_2,T_p} + X_{N_2,p} K_{N_2,T_p} + X_{H_2,p} K_{H_2,T_p}$$

**Density for Reactants:**

$$\rho_{r,T_r} = X_{H_2,r} \rho_{H_2,T_r} + X_{O_2,r} \rho_{O_2,T_r} + X_{N_2,r} \rho_{N_2,T_r}$$

**Density for Products:**

$$\rho_{p,T_p} = X_{H_2O,p} \rho_{H_2O,T_p} + X_{O_2,p} \rho_{O_2,T_p} + X_{N_2,p} \rho_{N_2,T_p} + X_{H_2,p} \rho_{H_2,T_p}$$

**Molecular Mass for Reactants:**

$$M_{eq,r} = X_{H_2,r} M_{H_2} + X_{O_2,r} M_{O_2} + X_{N_2,r} M_{N_2}$$

**Gas Constant for Reactants:**

$$R_{eq,r} = \frac{R}{M_{eq,r}}$$

**Molecular Mass for Products:**

$$M_{eq,p} = X_{H_2O,p} M_{H_2O} + X_{O_2,p} M_{O_2} + X_{N_2,p} M_{N_2} + X_{H_2,p} M_{H_2}$$

**Gas Constant for Products:**

$$R_{eq,p} = \frac{R}{M_{eq,p}}$$

**Specific Heat at Constant Volume for Reactants:**

$$C_{v,r,T_r} = R_{eq,r} - C_{p,r,T_r}$$

**Specific Heat at Constant Volume for Products:**

$$C_{v,p,T_p} = R_{eq,p} - C_{p,p,T_p}$$

**Specific Heat Ratio for Reactants:**

$$\gamma_{r,T_r} = \frac{C_{p,r,T_r}}{C_{v,r,T_r}}$$

**Specific Heat Ratio for Products:**

$$\gamma_{p,T_p} = \frac{C_{p,p,T_p}}{C_{v,p,T_p}}$$

## RESULTS & DISCUSSION:

Results obtained using above analysis are given in Appendix 1 and graphs are plotted accordingly.

## CONCLUSION:

Usually Hydrogen-air engine are operated in a equivalence ratio range of 0.6 to 1.0 [1, 2] and hence all the physical properties of reactants and products are evaluated in the wider equivalence ratio range of 0.2 to 1.4 for simulation purpose. The typical variations of specific heats only for reactants and products in the equivalence ratio range of 0.2 to 1.4 are depicted in Fig. 3.1 to Fig.3.10, respectively as a function of temperature. The individual constituent properties are taken from Roshenow et. al. [61]. These properties of reactants and products are used as input parameters for digital simulation of Hydrogen-air engine.

## REFERENCES :

1. Heywood J.B. "Internal Combustion Engine Fundamentals", New York, Mcgrow Hill Book Company,1988
2. Benson Ronald S : "Thermodynamics and Gas Dynamics of Internal Combustion Engine", Oxford University Press Vol. II 1986
3. Ganeshan V. "Computer Simulation of S.I.Engine Process, Mcgrow Hill Book Company Hyderabad, 1988
4. Richard Stone : "Introduction of I.C. Engine", Macmillan, Volume 1,1989
5. President's Council of Advisors on Science and Technology (PCAST) : "Federal Energy Research and Development for the Challenges of the Twenty-First Century", Report of the Energy Research and Development Panel, 5 November., 1997
6. Thomas, C.E., James, B.D., & Lomax, F.D. Jr. : "Market Penetration Scenarios for Fuel Cell Vehicles," Procs. 8th Ann. U.S. Hydrogen Mtg., Arlington VA, National Hydrogen Association, 11-13 March; Directed Technologies, Inc. (Arlington, VA 22203, 703/243-3383, fax -2724)., 1997
7. Thomas, C.E., Kuhn, I.F. Jr., James, B.D., Lomax, F.D. Jr., & Baum, G.N. : "Affordable Hydrogen Supply Pathways for Fuel Cell Vehicles," Int. J. Hydrogen Energy 23(6):507-516, June., 1998
8. Thomas, C.E., James, B.D., Lomax, F.D. Jr., & Kuhn, I.F. Jr. : "Fuel Options for the Fuel Cell Vehicle: Hydrogen, Methanol or Gasoline?," Fuel Cell Reformer Conference, Diamond Bar CA, South Coast Air Quality Management District, 20 November., 1998
9. Lovins, A.B. : "Putting Central Power Plants Out of Business," address to Aspen Institute Energy Forum, 7 July, RMI Publication, <http://redtail.stanford.edu/seminar/presentations/lovins1/sld001.htm>. , 1998
10. Bauen, A and Hart, D : "Further assessment of the environmental characteristics of fuel cells and competing technologies ETSU Report " F/02/00153/REP, ETSU, Harwell, UK., 1998
11. Cole, J : "Interannual-decadal variability in the tropical ocean atmosphere and the extra-tropical response", presentation at the International Conference on Paleoceanography, Lisbon, Aug 24-28.
12. Directed Technologies, Inc.: "Integrated analysis of hydrogen passenger vehicle transportation pathways", draft final report for National Renewable Energy Laboratory, US Department of Energy. , 1998
13. Ekdunge, P and Råberg, M : "The fuel cell vehicle - analysis of energy use, emissions and cost", Int J. Hydrogen Energy, Vol. 23, No. 5, pp. 381-385, 1998



**APPENDIX 1**

**PROPERTIES OF REACTANTAS & PRODUCTS AT DIFFERENT EQUIVALENCE RATIOS [ $\phi = 0.2$  TO 1.4]**

**RESULTS OF EQUIVALENCE RATIO  $\phi = 0.2$  [FOR REACTANTS]**

equivalence ratio = 0.2 for reactant  
The coeff. of nitrogen is = 9.404762  
The total mass of reactants is = 345.333344  
The mass fraction of hydrogen is = 0.005792  
The mass fraction of oxygen is = 0.231660  
The mass fraction of nitrogen is = 0.762548

TEMP	SP.HEAT	COND.	DENSITY	VIS.*10-6	PRANDTL NO.
-128.9	1.087693	0.014172	2.446491	4.301892	0.754106
-17.8	1.086853	0.023729	1.38333	13.90143	0.728573
93.4	1.09388	0.031227	0.962008	22.99353	0.717597
204.4	1.110434	0.03854	0.740984	36.11834	0.715276
315.6	1.133793	0.045657	0.598794	51.69798	0.715873
426.7	1.159739	0.051981	0.497406	68.61603	0.716913
537.8	1.187114	0.058208	0.435318	86.60126	0.721952
538.9	1.213098	0.063597	0.370308	111.0352	0.734008
760	1.239083	0.068365	0.342097	128.4653	0.745295

**RESULTS OF EQUIVALENCE RATIO  $\phi = 0.2$  [FOR PRODUCTS]**

equivalence ratio = 0.2 for product  
Enter choice= 1 for equivalence ratio = 1  
and 2 for eq. ratio > 1 and 3 for eq. ratio < 1 =3  
The coeff. of nitrogen is = 9.405000  
The total mass of products is = 345.339996  
The mass fraction of water is = 0.052123  
The mass fraction of oxygen is = 0.185325  
The mass fraction of nitrogen is = 0.762553

TEMP	SP.HEAT	COND.*10-3	DENSITY	VIS.*10-6	PRANDTL NO.
100	1.072855	31.371567	0.924259	22.48089	0.700436
200	1.076804	38.645306	0.728589	33.62896	0.674324
300	1.097287	45.435432	0.60165	46.55	0.669895
400	1.121009	51.779495	0.511857	61.23127	0.674527
500	1.147937	57.53101	0.445255	77.49941	0.676471
600	1.174594	62.789375	0.394896	94.71409	0.690025
700	1.197827	67.430435	0.354699	114.2104	0.710424
800	1.216931	71.578568	0.320398	134.6563	0.715849
900	1.239055	75.158722	0.293363	156.3397	0.763378
1000	1.25209	78.348572	0.270039	179.7046	0.759523

**RESULTS OF EQUIVALENCE RATIO  $\phi = 0.4$  [FOR REACTANTS]**

equivalence ratio = 0.4 for reactant  
The coeff. of nitrogen is = 4.702381  
The total mass of reactants is = 173.666672  
The mass fraction of hydrogen is = 0.011516  
The mass fraction of oxygen is = 0.230326  
The mass fraction of nitrogen is = 0.758157

TEMP	SP.HEAT	COND.	DENSITY	VIS.*10-6	PRANDTL NO.
-128.9	1.153177	0.014639	2.433376	4.462591	0.753846
-17.8	1.162188	0.024509	1.375911	14.31273	0.728507
93.4	1.170729	0.032263	0.956854	23.75998	0.717495
204.4	1.187476	0.039832	0.737013	37.28944	0.71505
315.6	1.210931	0.047185	0.595587	53.35518	0.715545
426.7	1.236958	0.053743	0.494737	71.00902	0.716597
537.8	1.264175	0.060095	0.432983	89.0024	0.721578
538.9	1.29024	0.065631	0.368328	114.6782	0.733622
760	1.316305	0.070534	0.340263	132.6499	0.744896

**RESULTS OF EQUIVALENCE RATIO  $\phi = 0.4$  [FOR PRODUCTS]**

equivalence ratio = 0.4 for product  
 Enter choice= 1 for equivalence ratio = 1  
 and 2 for eq. ratio > 1 and 3 for eq. ratio < 1 =3  
 The coeff. of nitrogen is = 4.700000  
 The total mass of products is = 197.599991  
 The mass fraction of water is = 0.091093  
 The mass fraction of oxygen is = 0.242915  
 The mass fraction of nitrogen is = 0.665992

TEMP	SP.HEAT	COND.*10-3	DENSITY	VIS.*10-6	PRANDTL NO.
100	1.110002	31.148037	0.919583	22.41802	0.716563
200	1.108557	38.575001	0.724427	33.56963	0.686486
300	1.130933	45.588989	0.598245	46.54879	0.681332
400	1.156366	52.230949	0.508911	61.3251	0.68484
500	1.184737	58.348747	0.442668	77.72895	0.683053
600	1.212955	64.031662	0.392607	94.74029	0.694921
700	1.237597	69.149391	0.352668	114.7915	0.718219
800	1.258941	73.836235	0.318547	135.4899	0.724223
900	1.282553	77.958237	0.291729	157.5223	0.767405
1000	1.296828	81.772995	0.268486	181.1599	0.764686

**RESULTS OF EQUIVALENCE RATIO  $\phi = 0.6$  [FOR REACTANTS]**

equivalence ratio = 0.6 for reactant  
 The coeff. of nitrogen is = 3.134795  
 The total mass of reactants is = 116.439857  
 The mass fraction of hydrogen is = 0.017176  
 The mass fraction of oxygen is = 0.229007  
 The mass fraction of nitrogen is = 0.753816

TEMP	SP.HEAT	COND.	DENSITY	VIS.*10-6	PRANDTL NO.
-128.9	1.217918	0.0151	2.420411	4.621469	0.75359
-17.8	1.236669	0.02528	1.368576	14.71936	0.728441
93.4	1.246708	0.033287	0.951757	24.51774	0.717395
204.4	1.263645	0.04111	0.733088	38.44728	0.714826
315.6	1.287194	0.048696	0.592416	54.99361	0.715221
426.7	1.313301	0.055485	0.492097	73.3749	0.716284
537.8	1.340362	0.061961	0.430676	91.37634	0.721208
538.9	1.366507	0.067643	0.366371	118.2799	0.73324
760	1.392652	0.072678	0.338451	136.7871	0.744502

**RESULTS OF EQUIVALENCE RATIO  $\phi = 0.6$  [FOR PRODUCTS]**

equivalence ratio = 0.6 for product  
Enter choice= 1 for equivalence ratio = 1  
and 2 for eq. ratio > 1 and 3 for eq. ratio < 1 =3  
The coeff. of nitrogen is = 3.315000  
The total mass of products is = 121.475998  
The mass fraction of water is = 0.148177  
The mass fraction of oxygen is = 0.087721  
The mass fraction of nitrogen is = 0.764102

TEMP	SP.HEAT	COND.*10-3	DENSITY	VIS.*10-6	PRANDTL NO.
100	1.188371	30.487631	0.880634	22.18219	0.738269
200	1.174232	37.942604	0.693657	33.24319	0.699749
300	1.195071	45.061718	0.572895	46.21164	0.692335
400	1.222052	51.862167	0.487348	61.0074	0.696114
500	1.252535	58.181118	0.424027	77.41839	0.702276
600	1.284	64.152939	0.37608	93.94023	0.71431
700	1.312142	69.60717	0.337716	114.6845	0.729635
800	1.336527	74.690254	0.305055	135.5131	0.735051
900	1.364235	79.217888	0.279274	157.5776	0.782166
1000	1.38392	83.62941	0.257108	181.6148	0.777519

**RESULTS OF EQUIVALENCE RATIO  $\phi = 0.8$  [FOR REACTANTS]**

equivalence ratio= 0.8 for reactant  
The coeff. of nitrogen is = 2.351191  
The total mass of reactants is = 87.833336  
The mass fraction of hydrogen is = 0.022770  
The mass fraction of oxygen is = 0.227704  
The mass fraction of nitrogen is = 0.749526

TEMP	SP.HEAT	COND.	DENSITY	VIS.*10-6	PRANDTL NO.
-128.9	1.281907	0.015556	2.407596	4.778501	0.753336
-17.8	1.310285	0.026043	1.361326	15.12127	0.728376
93.4	1.321803	0.034299	0.94672	25.2667	0.717296
204.4	1.338928	0.042373	0.729209	39.59165	0.714605
315.6	1.362571	0.050189	0.589282	56.613	0.714901
426.7	1.388757	0.057207	0.489489	75.71328	0.715975
537.8	1.415664	0.063806	0.428394	93.72267	0.720843
538.9	1.441888	0.069632	0.364436	121.8398	0.732863
760	1.468112	0.074797	0.336659	140.8763	0.744112

**RESULTS OF EQUIVALENCE RATIO  $\phi = 0.8$  [FOR PRODUCTS]**

equivalence ratio = 0.8 for product  
Enter choice= 1 for equivalence ratio = 1  
and 2 for eq. ratio > 1 and 3 for eq. ratio < 1 =3  
The coeff. of nitrogen is = 2.351250  
The total mass of products is = 91.834999  
The mass fraction of water is = 0.196004  
The mass fraction of oxygen is = 0.087113  
The mass fraction of nitrogen is = 0.716884

TEMP	SP.HEAT	COND.*10-3	DENSITY	VIS.*10-6	PRANDTL NO.
100	1.241089	30.114218	0.865344	22.06226	0.75749
200	1.218902	37.69878	0.681208	33.0991	0.71332
300	1.240782	45.026329	0.562656	46.11035	0.70466
400	1.269579	52.109684	0.478599	60.98711	0.707631
500	1.301831	58.778347	0.416432	77.50761	0.713204
600	1.335499	65.172112	0.369351	93.72288	0.723954
700	1.365796	71.103683	0.331659	115.1125	0.739201
800	1.39286	76.730988	0.299576	136.1796	0.744899
900	1.422963	81.808113	0.274274	158.5299	0.789745
1000	1.445241	86.891747	0.252494	182.9019	0.785424

**RESULTS OF EQUIVALENCE RATIO  $\phi = 1.0$  [FOR REACTANTS]**

equivalence ratio = 1 for reactant  
 The coeff. of nitrogen is = 1.880952  
 The total mass of reactants is = 70.666664  
 The mass fraction of hydrogen is = 0.028302  
 The mass fraction of oxygen is = 0.226415  
 The mass fraction of nitrogen is = 0.745283

TEMP	SP.HEAT	COND.	DENSITY	VIS.*10-6	PRANDTL NO.
-128.9	1.345179	0.016007	2.394925	4.933774	0.753085
-17.8	1.383075	0.026796	1.354158	15.51868	0.728311
93.4	1.396057	0.0353	0.94174	26.00727	0.717198
204.4	1.413368	0.043622	0.725373	40.72321	0.714387
315.6	1.437104	0.051665	0.586183	58.21425	0.714585
426.7	1.463368	0.058909	0.486909	78.02548	0.71567
537.8	1.490123	0.065629	0.426139	96.04273	0.720481
538.9	1.516425	0.071598	0.362524	125.3597	0.732491
760	1.542726	0.076892	0.334888	144.9196	0.743726

**RESULTS OF EQUIVALENCE RATIO  $\phi = 1.0$  [FOR PRODUCTS]**

equivalence ratio = 1 for product  
 Enter choice= 1 for equivalence ratio = 1  
 and 2 for eq. ratio > 1 and 3 for eq. ratio < 1 = 3  
 The total mass of products is = 70.667999  
 The mass fraction of water is = 0.254712  
 The mass fraction of nitrogen is = 0.745288

TEMP	SP.HEAT	COND.*10-3	DENSITY	VIS.*10-6	PRANDTL NO
100	1.314438	29.535793	0.835002	21.86322	0.780394
200	1.280646	37.208611	0.65703	32.83586	0.728338
300	1.30225	44.7117	0.542746	45.86511	0.717716
400	1.332929	52.042145	0.461642	60.79812	0.720386
500	1.367354	59.019184	0.401755	77.38396	0.730074
600	1.40407	65.810844	0.35634	93.1538	0.740197
700	1.437532	72.19796	0.319906	115.2924	0.750942
800	1.467796	78.351677	0.288963	136.566	0.756471
900	1.501532	83.963417	0.26451	159.0942	0.802245
1000	1.528286	89.757217	0.243548	183.8772	0.797028

**RESULTS OF EQUIVALENCE RATIO  $\phi = 1.2$  [FOR REACTANTS]**

equivalence ratio = 1.2 for reactant  
 The coeff. of nitrogen is = 1.880952  
 The total mass of reactants is = 71.066666  
 The mass fraction of hydrogen is = 0.033771  
 The mass fraction of oxygen is = 0.225141  
 The mass fraction of nitrogen is = 0.741088

TEMP	COND.	SP.HEAT	DENSITY	VIS.*10-6	PRANDTL NO.
-128.9	1.407739	0.016452	2.382396	5.087298	0.752837
-17.8	1.455047	0.027541	1.34707	15.91161	0.728248
93.4	1.469475	0.036289	0.936815	26.73949	0.717101
204.4	1.48697	0.044856	0.72158	41.84203	0.714171
315.6	1.510797	0.053125	0.583119	59.79747	0.714272
426.7	1.537139	0.060593	0.484359	80.31164	0.715368
537.8	1.563743	0.067432	0.423908	98.33669	0.720124
538.9	1.590122	0.073542	0.360632	128.8401	0.732122
760	1.616501	0.078964	0.333136	148.9175	0.743345

**RESULTS OF EQUIVALENCE RATIO  $\phi = 1.2$  [FOR PRODUCTS]**

equivalence ratio = 1.2 for product  
 Enter choice= 1 for equivalence ratio = 1  
 and 2 for eq. ratio > 1 and 3 for eq. ratio < 1 =3  
 The coeff. of nitrogen is = 1.881000  
 The total mass of products is = 71.068001  
 The mass fraction of water is = 0.253279  
 The mass fraction of hydrogen is = 0.005628  
 The mass fraction of nitrogen is = 0.741093

TEMP	SP.HEAT	COND.*10-3	DENSITY	VIS.*10-6	PRANDTL NO.
100	1.388331	30.575327	0.830673	22.64707	0.779934
200	1.354983	38.467888	0.653625	33.98047	0.728049
300	1.37667	45.929626	0.539934	47.43884	0.717399
400	1.407398	53.462521	0.459245	62.98547	0.720053
500	1.441664	60.805946	0.399644	79.74573	0.729673
600	1.478299	67.710686	0.354492	96.22054	0.73976
700	1.511776	74.211136	0.318248	119.118	0.750493

**RESULTS OF  $\phi = 1.4$  [FOR REACTANTS]**

equivalence ratio = 1.4 for reactant  
 The coeff. of nitrogen is = 1.880952  
 The total mass of reactants is = 71.466667  
 The mass fraction of hydrogen is = 0.039179  
 The mass fraction of oxygen is = 0.223881  
 The mass fraction of nitrogen is = 0.736940

TEMP	SP.HEAT.	COND	DENSITY	VIS.*10-6	PRANDTL NO.
-128.9	1.469599	0.016893	2.370008	5.239104	0.752591
-17.8	1.526213	0.028278	1.340061	16.30015	0.728185
93.4	1.542071	0.037268	0.931946	27.46353	0.717006
204.4	1.559748	0.046077	0.717829	42.94832	0.713957
315.6	1.583666	0.054568	0.580089	61.36297	0.713963
426.7	1.610084	0.062257	0.481837	82.57221	0.715069

537.8	1.636539	0.069215	0.421703	100.6049	0.71977
538.9	1.662994	0.075465	0.358762	132.2814	0.731757
760	1.68945	0.081013	0.331404	152.8705	0.742968

**RESULTS OF  $\varnothing = 1.4$  [FOR PRODUCTS]**

equivalence ratio 1.4 for product  
 Enter choice= 1 for equivalence ratio = 1  
 and 2 for eq. ratio > 1 and 3 for eq. ratio < 1 =3  
 The coeff. of nitrogen is = 1.881000  
 The total mass of products is = 71.468002  
 The mass fraction of water is = 0.251861  
 The mass fraction of hydrogen is = 0.011194  
 The mass fraction of nitrogen is = 0.736945


TEMP	SP.HEAT	COND.*10-3	DENSITY	VIS.*10-6	PRANDTL NO.
100	1.461397	31.603226	0.826392	23.42214	0.779478
200	1.428487	39.71307	0.650258	35.11225	0.727763
300	1.450256	47.133923	0.537154	48.99497	0.717085
400	1.481034	54.867001	0.456875	65.14834	0.719724
500	1.515142	62.572712	0.397556	82.08106	0.729275
600	1.551697	69.589256	0.352665	99.25295	0.739329
700	1.585189	76.201775	0.316608	122.9008	0.750049

**TABLE 1 PROPERTIES OF HYDROGEN [1,5]**


International symbol		H2
Molecular weight		2.016
Specific gravity of gas at 32 F and 1 atm (air = 1)		0.06950
Specific volume at 70 F and 1 atm, cu ft/lb		192.0
Density of gas at 70 F and 1 atm, lb/cu ft		0.005209
Density of gas at boiling point and 1 atm, lb/cu ft		0.084
Density of liquid at boiling point and 1 atm, lb/cu ft		4.428
Liquid/gas ratio		
(liquid at boiling point, gas at 70 F and 1 atm), vol/vol		1/850.1
Boiling point at 1 atm		- 423.0 F
Freezing point at 1 atm		- 434.6 F
Critical temperature		- 399.91 F
Critical pressure, psia		190.8
Triple point		-434.56F at 1.0414 psia
Latent heat of vaporization at boiling point, Btu/lb		192.7
Specific heat, $C_p$ , at 70 F. Btu/(lb)(°F)		3.416
Specific heat, $C_u$ , at 70 F. Btu/(lb)(°F)		2.430
Ratio of specific heats, $C_p/C_u$ , at 70 F		1.41
Heat of combustion, Btu/cu ft		
	Gross	325
	Net	275
Solubility in water at 60 F. vol/1 vol of water		0.019
Weight per gallon, liquid, at boiling point, lb		0.5920

**RESULTS OF REACTANTS AT DIFFERENT EQUIVALENCES RATIOS [ $\phi = 0.2$  TO 1.4]**


**Specific Heat for Reactant for  $\phi = 0.2$  to 1.4**

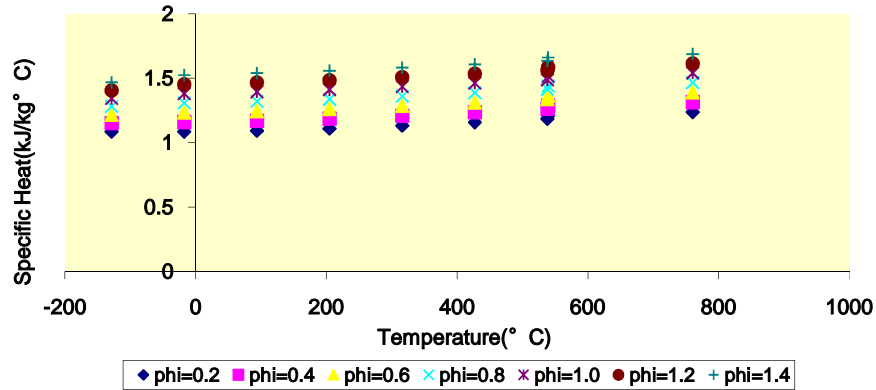

**Thermal conductivity for Reactant for  $\phi = 0.2$  to 1.4**

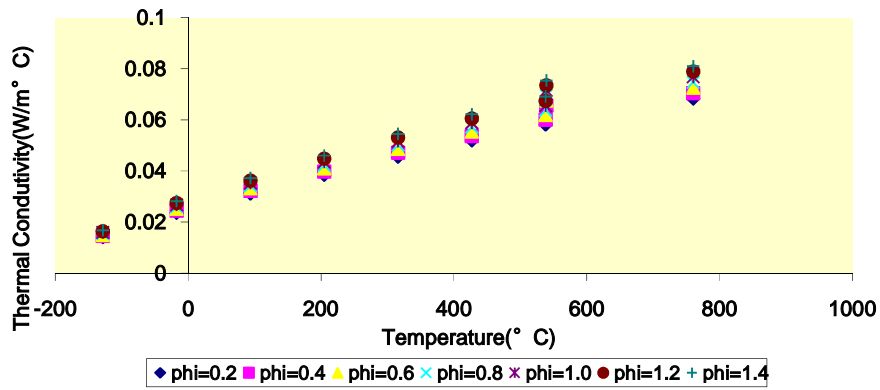


**Density for Reactant for  $\phi = 0.2$  to 1.4**

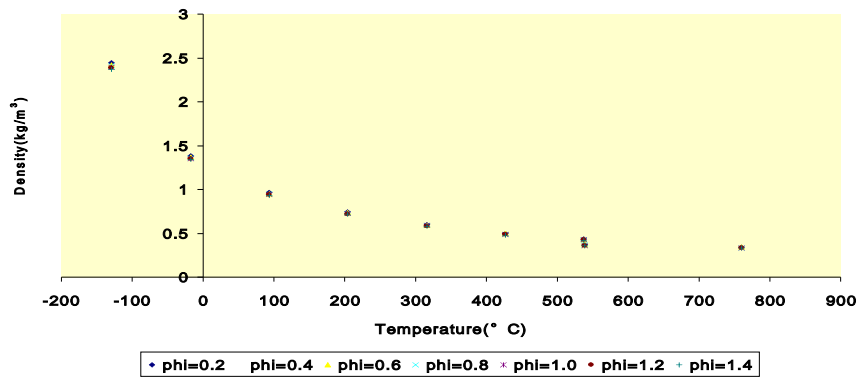






### Thermal conductivity for Product for $\phi = 0.2$ to 1.4

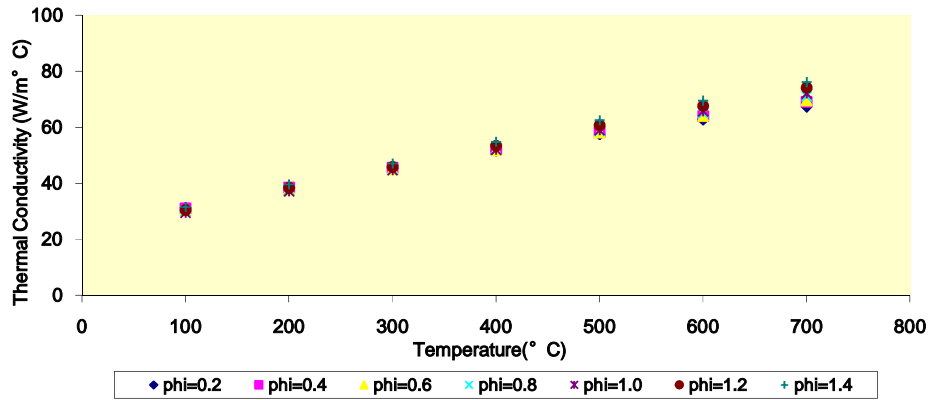


Thermal Conductivity v/s Temperature for Products for  $\phi = 0.2$  To 1.4

### Density for Product for $\phi = 0.2$ to 1.4

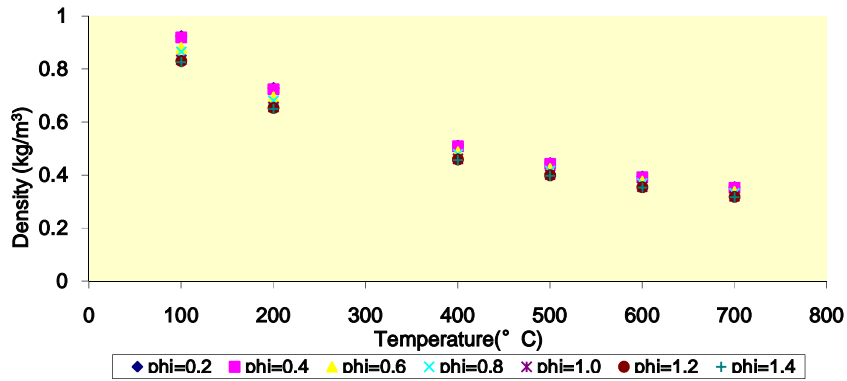


Density v/s Temperature for Products for  $\phi = 0.2$  To 1.4

### Kinematic Viscosity for Product for $\phi = 0.2$ to 1.4

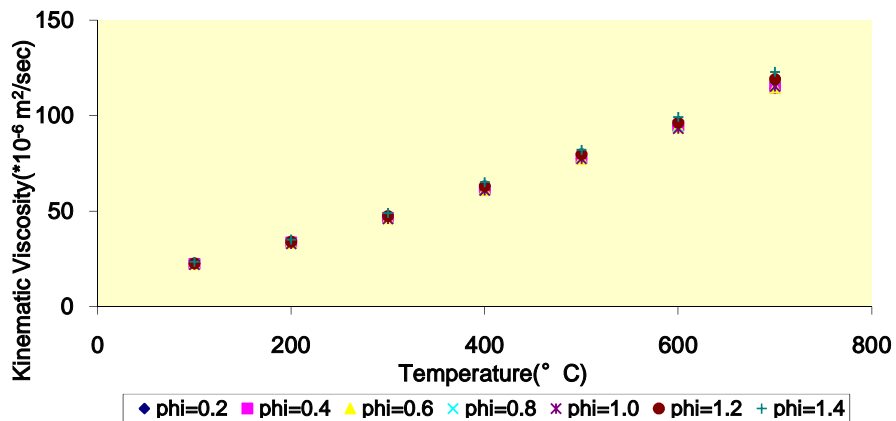

Kinematics Viscosity v/s Temperature for Products for  $\phi = 0.2$  To 1.4

**Prandtl Number for Product for  $\phi = 0.2$  to 1.4**

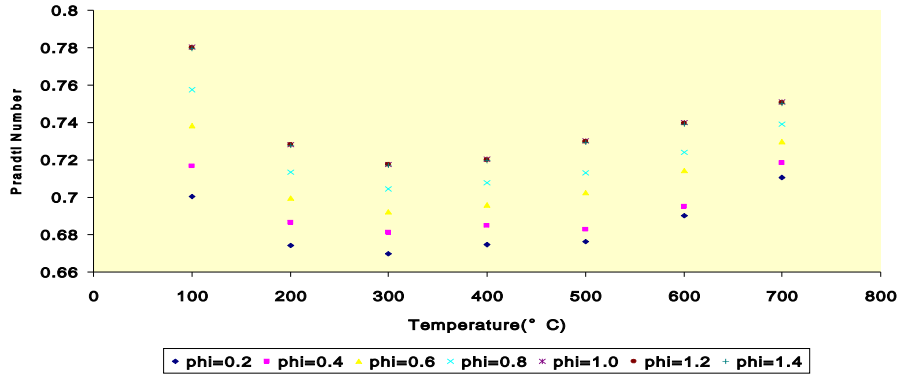


Prandtl No. v/s Temperature for Products for  $\phi = 0.2$  To 1.4

**MASS FRACTION OF REACTANT DIFFERENT EQUIVALENC RATIO**

**Table 3.1 Mass Fraction of Reactant at Different Equivalence Ratios**

$\Phi$	H <sub>2r</sub>	O <sub>2r</sub>	N <sub>2r</sub>	Total Reactant[Kg/mole]
0.2	0.005792	0.2316	0.7625	345.33
0.4	0.01151	0.2303	0.7581	173.66
0.6	0.0171	0.229	0.7538	116.43
0.8	0.0227	0.2277	0.7459	87.8333
1	0.0283	0.2264	0.7452	70.6666
1.2	0.0337	0.2251	0.741	71.0666
1.4	0.03917	0.2238	0.7369	71.466

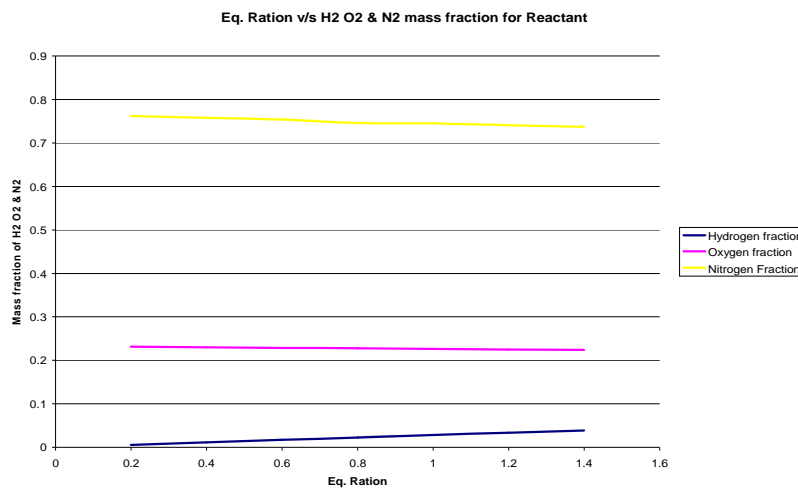


Variation of mass fraction of H<sub>2</sub>, O<sub>2</sub> & N<sub>2</sub> with respect to different equivalence ratio for reactant

**MASS FRACTION OF PRODUCT AT DIFFERENT EQUIVALENCE RATIOS**

**Mass Fraction of Product at Different Equivalence Ratios**

$\Phi$	H <sub>2</sub> O <sub>p</sub>	O <sub>2p</sub>	N <sub>2p</sub>	H <sub>2p</sub>	Total Product [Kg/mole]
0.2	0.05212	0.1853	0.7625	0	345.33
0.4	0.091	0.2429	0.6659	0	173.66
0.6	0.1481	0.0877	0.7641	0	116.43
0.8	0.196	0.0871	0.7168	0	87.8333
1	0.2547	0	0.7452	0	70.6666
1.2	0.2532	0	0.741	0.005628	71.0666
1.4	0.2518	0	0.7369	0.0111	71.466

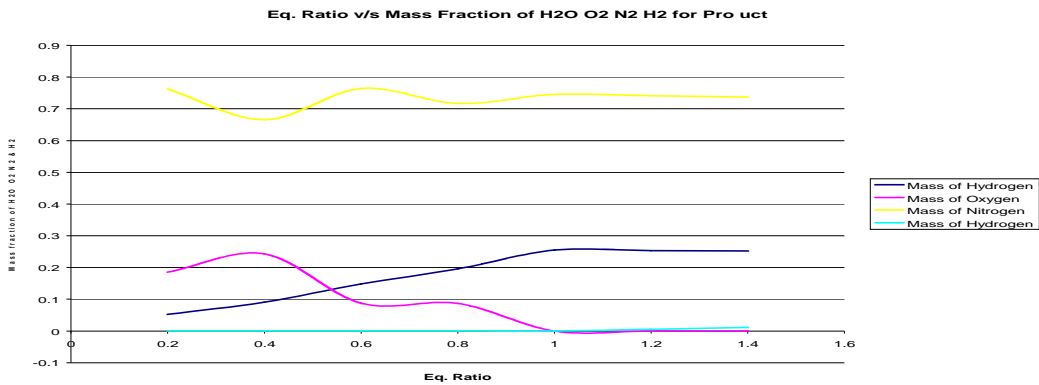

Variation of mass fraction of H<sub>2</sub>O, H<sub>2</sub>, O<sub>2</sub> & N<sub>2</sub> with respect to different equivalence ratio for Product